

## SCHOTTKY BARRIER RECTIFIERS

### Major ratings and characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular Waveform	30	A
$V_{RRM}$	30	V
$V_F@15A, T_j=125^{\circ}C$	0.38	V, typ
$T_j$ (operating/storage)	-65 to 150	$^{\circ}C$

**Device optimized for low forward voltage drop to maximize efficiency in Power Supply applications**



### ELECTRICAL FEATURES:

- ◆ Schottky Barrier Rectifier
- ◆ Guard Ring Protection
- ◆ Low Forward Voltage
- ◆ Reverse Energy Tested
- ◆ High Current Capability
- ◆ Case Material: Molded Plastic.

UL Flammability Class 94V-0

### MECHANICAL:


- \* Molded Plastic TO-220AB

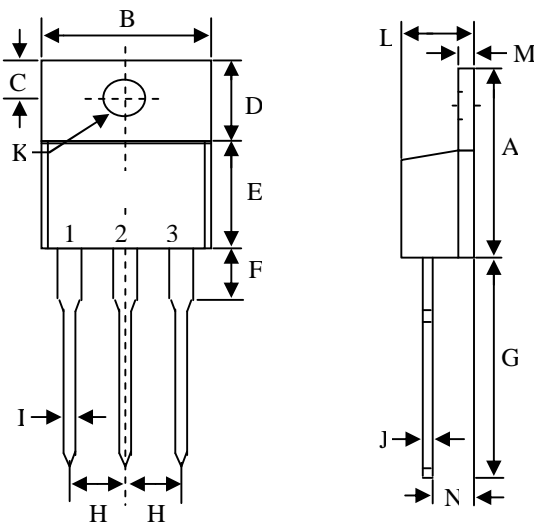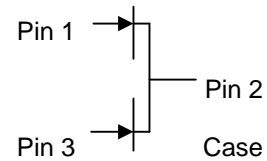


TO-220		
DIM	MIN	MAX
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	9.65	10.67
F	-	6.35
G	12.7	14.73
H	2.29	2.79
I	0.51	1.14
J	0.3	0.64
K	3.53	4.09
L	3.56	4.83
M	1.14	1.4
N	2.03	2.92
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics (at 25°C unless otherwise specified)				
	SYMBOL	VALUE		UNITS
DC Blocking Voltage Working Peak Reverse Voltage Peak Repetitive Reverse Voltage	$V_{RM}$ $V_{RWM}$ $V_{RRM}$	40		Volts
Average Rectified Forward Current at $T_c=110^\circ C$	$I_o$	30		Amps
Peak Forward Surge Current at 8.3mS single half-sine wave	$I_{FSM}$	250		Amps
Peak Repetitive Reverse Surge Current (2uS-1Khz)	$I_{RRM}$	3		Amps
Instantaneous Forward Voltage (per leg) $I_F= 15A; T_J= 25^\circ C$ $30A; T_J= 25^\circ C$ $I_F= 15A; T_J= 125^\circ C$	$f =$ $V_F^*$	Typ --- --- ---	Max 0.48 0.57 0.40	Volts
Maximum Instantaneous Reverse Current at Rated $V_{RM}$ $T_J= 25^\circ C$ $T_J= 100^\circ C$	$I_R$	Typ --- ---	Max 1.2 300	mA
Maximum Rate of Voltage Change (at Rated $V_R$ )	dv/dt	10,000		V/uS
Maximum Thermal Resistance jc (per leg) Package = TO-220AB, TO-262, & TO-263 Package = ITO-220	$R_{\theta jc}$	2 4		°C/W
Operating and Storage Junction Temperature	$T_J$	-65 to +150		°C


\* Pulse width < 300 uS, Duty cycle < 2%

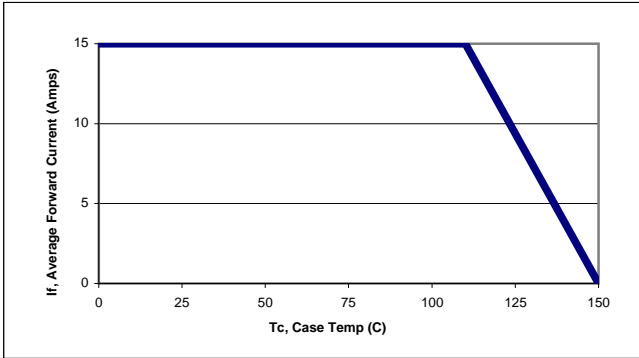

**Figure 1: Current Derating Curve per element**

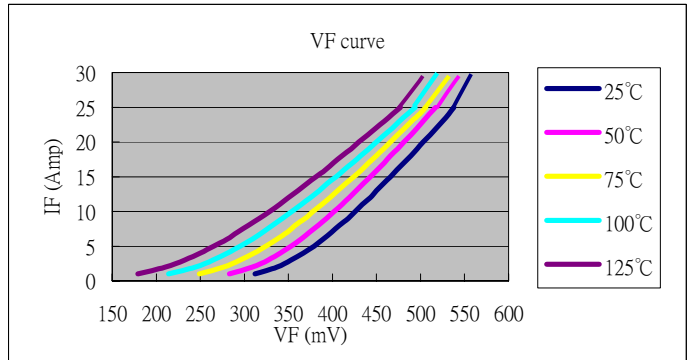

**Figure 2: Typical Forward Voltage**

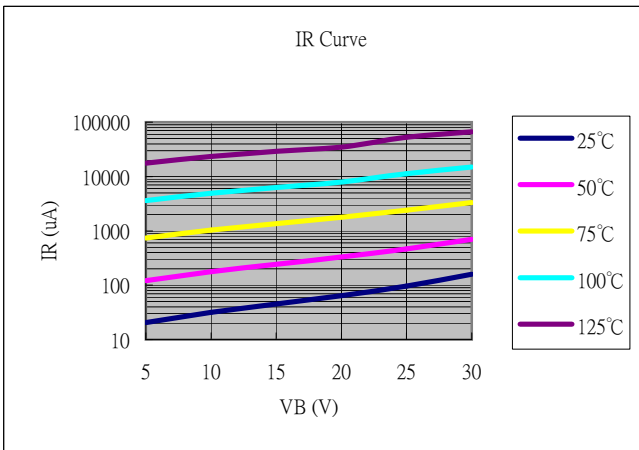

**Figure 3: Typical Reverse Current**

Royal Alliance Corporation reserves the right to make changes without further notice to any products herein. Royal Alliance Corporation makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Royal Alliance Corporation assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Royal Alliance Corporation data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Royal Alliance Corporation does not convey any license under its patent rights nor the rights of others. Royal Alliance Corporation products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Royal Alliance Corporation product could create a situation where personal injury or death may occur. Should Buyer purchase or use Royal Alliance Corporation products for any such unintended or unauthorized application, Buyer shall indemnify and hold Royal Alliance Corporation and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Royal Alliance Corporation was negligent regarding the design or manufacture of the part..